

+

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35.62436

First Named Inventor or Application Identifier

SATOSHI NAKAYAMA

Express Mail Label No.

10584 U.S. PTO  
09/361152  
07/27/99

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

## ADDRESS TO:

Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

☒ Fee Transmittal Form

(Submit an original, and a duplicate for fee processing)

☒ Specification

Total Pages

35

☒ Drawing(s)

(35 USC 113)

Total Sheets

6

☒ Oath or Declaration

Total Pages

1

a. ☐

Newly executed (original or copy)

b. ☒

Unexecuted for information purposes

c. ☐

Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 5 below]

i. ☐

DELETION OF INVENTOR(S)

Signed Statement attached deleting inventor(s) named in  
the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).

5. ☐

Incorporation By Reference (useable if Box 4c is checked)

The entire disclosure of the prior application, from which a copy of the oath or  
declaration is supplied under Box 4c, is considered as being part of the disclosure of  
the accompanying application and is hereby incorporated by reference therein.

6. ☐

Microfiche Computer Program (Appendix)

7. ☐

Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)

a. ☐

Computer Readable Copy

b. ☐

Paper Copy (identical to computer copy)

c. ☐

Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☐

Assignment Papers (cover sheet & documents)

9. ☐

37 CFR 3.73(b) Statement  
(when there is an assignee)

☐ Power of Attorney

10. ☐

English Translation Document (if applicable)

11. ☐

Information Disclosure  
Statement (IDS)/PTO-1449

☐ Copies of IDS  
Citations

12. ☐

Preliminary Amendment

13. ☒

Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)

14. ☐

Small Entity  
Statement(s)

☐ Statement filed in prior application  
Status still proper and desired

15. ☐

Certified Copy of Priority Document(s)  
(if foreign priority is claimed)

16. ☐

Other: \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐

Continuation

☐

Divisional

☐

Continuation-in-part (CIP)

of prior application No. \_\_\_\_/\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

☒

Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐

Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	20-20 -	0	X \$ 18.00 -	\$ 00.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	6-3 -	3	X \$ 78.00 -	\$ 234.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 -	\$ 00.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
			Total of above Calculations =		\$ 994.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
TOTAL =					\$ 994.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 994.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

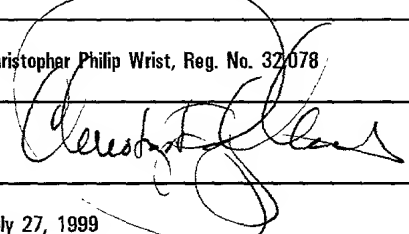NAME	Christopher Philip Wrist, Reg. No. 32078
SIGNATURE	
DATE	July 27, 1999

TITLE OF THE INVENTION

IMAGE PICKUP APPARATUS HAVING  
FLASH AND COLOR ADJUSTMENT CONTROL

5

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to an image pickup  
10 apparatus capable of using a flash apparatus.

Description of the Related Art

In an image pickup apparatus such as an electronic  
camera, it is required to use a flash apparatus (flash)  
when a picture of a subject is taken in a low ambient light  
15 environment or in a backlighted situation.

It is also required to adjust the white balance in  
accordance with the color temperature of a subject. However,  
in the case where artificial lighting is employed, color  
rendering is poor and thus correction of only the white  
20 balance is not sufficient to obtain good color balance in  
many cases. In view of the above, various techniques have  
been proposed for correcting a hue or chroma saturation  
depending on the white balance. Some of those conventional  
techniques are described below with reference to the  
25 drawings.

Fig. 6 is a block diagram illustrating an image sensing system used in a conventional electronic camera. As shown, the image sensing system include a lens 201, an iris diaphragm 202, an image sensing device 203, a luminance signal generating circuit 204 for generating a luminance signal in accordance with the output of the image sensing device, a luminance signal processing circuit 205 for performing processing such as gamma processing and edge enhancement, a color separation circuit 206 for generating color signals associated with three colors R, G, and B, a white balance amplifier 207 for controlling the white balance by adjusting the gains associated with the R-signal and B-signal, a color difference matrix circuit 208 for generating color difference signals R-Y and B-Y from the R-, G- and B-signals output from the white balance amplifier 207, a linear matrix circuit 209 for adjusting the hue, a color difference gain control circuit 210 for adjusting the color saturation by controlling the gains of the color difference signals R-Y and B-Y, an encoder 211 for generating a video signal from the luminance signal and the color difference signals, a white balance control circuit 212 for extracting color temperature information from the color difference signals and controlling the gain of the white balance amplifier 207, a hue correcting circuit 213 for correcting the hue and the chroma saturation based on

the white balance information supplied from the white balance control circuit 212, a flash apparatus 214, and a flash control circuit 215 for controlling the timing and the amount of light generated by the flash apparatus 214.

5       Light incident on the lens 201 is passed through the iris diaphragm 202 and adjusted as to control the amount of exposure. The light then falls on the image sensing device 203. The image sensing device 203 converts the received light to a corresponding electric charge and accumulates it.  
10       The image signal output from the image sensing device 203 is separated by the luminance signal generating circuit 204 into a luminance signal Y and a color signal. The resultant luminance signal Y is applied to the luminance signal processing circuit 205 and subjected to processing such as  
15       gamma processing and edge enhancement.

On the other hand the color signal is applied to the color separation circuit 206 and separated into three color signals R, G, and B. The white balance amplifier 207 makes a white balance adjustment on the R-, G-, and B-signals and  
20       also performs gamma processing on them. The resultant R-, G-, and B-signals are applied to the color difference matrix circuit 208 and converted into color difference signals R-Y and B-Y. The resultant color difference signals R-Y and B-Y are applied to the linear matrix circuit 209  
25       and adjusted in terms of the hue.

09361450290  
6642402519560

The signals output from the linear matrix circuit 209 are applied to the color difference gain control circuit 210 and the gains of the respective color difference signals R-Y and B-Y are adjusted. The resultant signals  
5 output from the color difference gain control circuit 210 are applied to the encoder 211 and encoded into a video signal. The signals output from the color difference gain control circuit 210 are also supplied to the white balance control circuit 212. The white balance control circuit 212  
10 detects the color temperature from the color difference signals. The white balance control circuit 212 then calculates the gain of the white balance amplifier 207 in accordance with the detected color temperature and controls the white balance.

15 The flash control circuit 215 controls the flash apparatus 214 such that light is generated by the flash apparatus 214 during a charge accumulation period of the image sensing device 203, wherein the amount of light is controlled in accordance with the luminance signal Y.

20 The color temperature of a subject varies depending on the type of a light source. When artificial lighting is employed, color rendering is poor and thus correction of only the white balance is not sufficient to obtain good color balance in many cases. Therefore it is required to  
25 correct also the hue and the chroma saturation depending on

the white balance.

Thus, the white balance control circuit 212 supplies white balance correction information to the hue correcting circuit 213. The hue correcting circuit 213 calculates an optimum hue from the white balance information and controls the linear matrix circuit 209 and the color difference gain control circuit 210 so as to obtain the optimum hue. Herein, the output signals of the linear matrix circuit 209 are given by:

10 
$$(R - Y)' = (R - Y) + \alpha(B - Y) \quad (-1 < \alpha < 1) \quad (1)$$

$$(B - Y)' = (B - Y) + \beta(R - Y) \quad (-1 < \beta < 1) \quad (2)$$

Thus, it is possible to adjust the hue of the color difference signals by varying factors  $\alpha$  and  $\beta$ , in equations (1) and (2), of the linear matrix circuit 209. That is, the hue correcting circuit 213 corrects the hue by adjusting  $\alpha$  and  $\beta$  associated with the linear matrix circuit 209.

In the case where the flash apparatus 214 is used, it is required to correct the white balance depending on the intensity of ambient light and the amount of light

20 generated by the flash apparatus 214. The flash control circuit 215 supplies information representing the intensity of ambient light determined from the luminance signal Y and also representing the amount of light generated by the flash apparatus 215 to the white balance control circuit  
25 212. In accordance with the received information, the white

balance control circuit 212 controls the white balance for an image taken using the flash apparatus 214.

In the above-described conventional image pickup apparatus, although the white balance can be corrected for an image taken using the flash apparatus, the hue or chroma saturation is not adjusted in accordance with the color rendering of the flash.

Figs. 5A and 5B illustrate spectral distributions of solar light and flash light, respectively. As can be seen from Figs. 5A and 5B, the color rendering of the flash is lower than that of the solar light. This causes not only a difference in color temperature but also a difference in color balance.

This means that when a picture is taken using a flash apparatus under conditions in terms of hues optimized for solar light, it is not always possible to achieve good color balance.

#### SUMMARY OF THE INVENTION

Thus, an object of the present invention is to provide an image pickup apparatus capable of achieving optimum color balance when a picture is taken using a flash apparatus.

According to an aspect of the present invention, to achieve the above object, there is provided an image pickup



apparatus using a flash apparatus (flash apparatus 114 in  
embodiments described later), comprising: amount-of-light  
controlling means (flash control circuit 115 in the  
embodiments described later) for controlling the amount of  
5 light generated by the flash apparatus; color adjusting  
means (linear matrix circuit 109 and/or gain control  
circuit 110 in the embodiments described later) for  
controlling a hue or color saturation; and first hue  
controlling means (color correcting circuit B 116 in the  
10 embodiments described later) for controlling the color  
adjusting means such that the hue or color saturation is  
corrected in accordance with the amount of light determined  
by the amount-of-light controlling means.

Preferably, the above-described image pickup  
15 apparatus further comprises color temperature detecting  
means (white balance control circuit 112 in the embodiments  
described later) for detecting the color temperature of a  
subject; and second hue controlling means (color correcting  
circuit A 113 in the embodiments described later) for  
20 controlling the color adjusting means in accordance with  
the color temperature of the subject, wherein the first hue  
controlling means corrects the correction result of the  
second hue controlling means.

In the above-described image pickup apparatus  
25 according to the present invention, the color adjusting

0936159-072799

means may include a matrix circuit (linear matrix circuit 109 in the embodiments described later) which multiplies a first color difference signal (R-Y in the embodiments described later) by a factor and adds the result to a  
5 second color difference signal (B-Y in the embodiments described later) and which multiplies the second difference signal by a factor and adds the result to the first color difference signal.

According to another aspect of the present invention,  
10 there is provided an image pickup apparatus using a flash apparatus (flash apparatus 114 in the embodiments described later), comprising: illuminance detecting means (luminance signal generating circuit 104 in the embodiments described later) for detecting the illuminance of a subject; color  
15 adjusting means (linear matrix circuit 109 and/or gain control circuit 110 in the embodiments described later) for controlling a hue or color saturation; and first hue controlling means (color correcting circuit B 116 in the embodiments described later) for controlling the color  
20 adjusting means such that the hue or color saturation is corrected in accordance with the illuminance detected by the illuminance detecting means.

Preferably, the above-described image pickup apparatus further comprises color temperature detecting  
25 means (white balance control circuit 112 in the embodiments

09364133 072799

described later) for detecting the color temperature of a subject; and second hue controlling means (color correcting circuit A 113 in the embodiments described later) for controlling the color adjusting means in accordance with  
5 the color temperature of the subject, wherein the first hue controlling means makes a correction on a value corrected by the second hue controlling means.

In the above-described image pickup apparatus according to the present invention, the color adjusting  
10 means may include a matrix circuit (linear matrix circuit 109 in the embodiments described later) which multiplies a first color difference signal (R-Y in the embodiments described later) by a factor and adds the result to a second color difference signal (B-Y in the embodiments  
15 described later) and which multiplies the second difference signal by a factor and adds the result to the first color difference signal.

According to still another aspect of the present invention, there is provided an image pickup apparatus  
20 using a flash apparatus (flash apparatus 114 in the embodiments described later), comprising: color temperature detecting means (white balance control circuit 112 in the embodiments described later) for detecting the color temperature of a subject; illuminance detecting means  
25 (luminance signal generating circuit 104 in the embodiments

described later) for detecting the illuminance of a  
subject; amount-of-light controlling means (flash control  
circuit 115 in the embodiments described later) for  
controlling the amount of light generated by the flash  
5 apparatus; color adjusting means (linear matrix circuit 109  
and/or gain control circuit 110 in the embodiments  
described later) for controlling hue or color saturation;  
first hue controlling means (color correcting circuit A 113  
in the embodiments described later) for controlling a hue  
10 or color saturation in accordance with the color  
temperature of a subject detected by the color temperature  
detecting means; and second hue controlling means (color  
correcting circuit B 116 in the embodiments described  
later) for controlling the color adjusting means such that  
15 the hue or color saturation is corrected in accordance with  
the illuminance detected by the illuminance detecting means  
and also in accordance with the amount of light determined  
by the amount-of-light controlling means.

In the above-described image pickup apparatus  
20 according to the present invention, the color adjusting  
means may include a matrix circuit (linear matrix circuit  
109 in the embodiments described later) which multiplies a  
first color difference signal (R-Y in the embodiments  
described later) by a factor and adds the result to a  
25 second color difference signal (B-Y in the embodiments

09364152 072799

described later) and which multiplies the second difference signal by a factor and adds the result to the first color difference signal.

According to still another aspect of the present invention, there is provided an image pickup apparatus capable of using a flash apparatus (flash apparatus 114 in the embodiments described later), comprising: color adjusting means (linear matrix circuit 109 and/or gain control circuit 110 in the embodiments described later) for controlling hue or color saturation; color temperature detecting means (white balance control circuit 112 in the embodiments described later) for detecting the color temperature of a subject; first hue controlling means (color correcting circuit A 113 in the embodiments described later) for controlling the color adjusting means in accordance with the color temperature of a subject detected by the color temperature detecting means; memory means (memory 117 in the embodiments described later) for storing hue information used to make a color correction when the flash apparatus is used; and second hue controlling means (color correcting circuit B 116 in the embodiments described later) for controlling the color adjusting means in accordance with the hue information stored in the memory means such that the hue information for the flash apparatus is selected when the flash

apparatus is used.

In the above-described image pickup apparatus according to the present invention, the color adjusting means may include a matrix circuit (linear matrix circuit 5 109 in the embodiments described later) which multiplies a first color difference signal (R-Y in the embodiments described later) by a factor and adds the result to a second color difference signal (B-Y in the embodiments described later) and which multiplies the second difference 10 signal by a factor and adds the result to the first color difference signal.

According to still another aspect of the present invention, there is provided an image pickup apparatus using a flash apparatus (flash apparatus 114 in the 15 embodiments described later), comprising: white balance controlling means (white balance control circuit 112 in the embodiments described later) for controlling white balance in accordance with the illuminance of a subject or the amount of light generated by the flash apparatus; color 20 adjusting means (linear matrix circuit 109 and/or gain control circuit 110 in the embodiments described later) for controlling hue or color saturation; and hue controlling means (color correcting circuit A 113 and color correcting circuit B 116 in the embodiments described later) and for 25 controlling the color adjusting means in accordance with

093E152.072799

the white balance information generated by the white balance controlling means such that when white balance information varies in response to the illuminance of the subject or the amount of light generated by the flash apparatus, the hue controlling means controls the color adjusting means in accordance with the white balance information.

In the above-described image pickup apparatus according to the present invention, the color adjusting means may include a matrix circuit (linear matrix circuit 109 in the embodiments described later) which multiplies a first color difference signal by a factor and adds the result to a second color difference signal and which multiplies the second difference signal by a factor and adds the result to the first color difference signal.

According to still another aspect of the present invention, there is provided an image pickup apparatus using a flash apparatus (flash apparatus 114 in the embodiments described later), comprising: color adjusting means (linear matrix circuit 109 and/or gain control circuit 110 in the embodiments described later) for controlling hue or color saturation; and hue controlling means (color correcting circuit 317 in the embodiments described later) for controlling the color adjusting means such that when the flash apparatus is used, the color

adjusting means corrects the hue or color saturation.

In the above-described image pickup apparatus according to the present invention, the hue correcting means (color correcting circuit 317 in the embodiments  
5 described later) may have correction data (hue data B) associated with the hue or color saturation employed when the flash apparatus is used and also have correction data (hue data B) associated with the hue or color saturation employed when the flash apparatus is not used, and wherein  
10 the hue correcting means selects proper correction data depending on whether the flash apparatus is used or not.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating a first  
15 embodiment of the present invention;

Figs. 2A to 2C are vector diagrams illustrating color balance for various types of light sources;

Fig. 3, which includes Figs. 3A to 3D, is a conceptual representation of a color balance correction  
20 operation according to the first embodiment of the present invention;

Fig. 4 is a block diagram illustrating a second embodiment of the present invention;

Figs. 5A and 5B are graphs illustrating a spectral  
25 distribution of ambient light and light generated by a



flash apparatus, respectively; and

Fig. 6 is a block diagram illustrating a conventional technique.

5        DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The present invention is described in further detail below with reference to preferred embodiments in conjunction with the accompanying drawings.

10      First Embodiment

Fig. 1 is a block diagram illustrating an image pickup apparatus embodying the present invention, in which good color balance can be achieved when a picture is taken using a flash apparatus.

15        As shown in Fig. 1, the image pickup apparatus includes an imaging lens 101, an iris diaphragm 102, an image sensing device 103, a luminance signal generating circuit 104 for generating a luminance signal in accordance with the output of the image sensing device 103, a  
20      luminance signal processing circuit 105 for performing processing such as gamma processing and edge enhancement, a color separation circuit 106 for generating color signals associated with three colors R, G, and B, a white balance amplifier 107 for controlling the white balance by  
25      adjusting the gains associated with the R-signal and B-

signal, a color difference matrix circuit 108 for  
generating color difference signals R-Y and B-Y from the R-,  
G- and B-signals output from the white balance amplifier  
107, a linear matrix circuit 109 which receives the color  
5 difference signals R-Y and B-Y from the color difference  
matrix circuit 108 and which makes an adjustment thereon, a  
color difference gain control circuit 110 for adjusting the  
color saturation by controlling the gains of the color  
difference signals R-Y and B-Y, an encoder 111 for  
10 generating a video signal from the luminance signal and the  
color difference signals, a white balance control circuit  
112 for extracting color temperature information from the  
color difference signals and controlling the gain of the  
white balance amplifier 107, a hue correcting circuit A 113  
15 for correcting the hue and the chroma saturation based on  
the white balance information supplied from the white  
balance control circuit 112, a flash apparatus 114, a flash  
control circuit 115 for controlling the timing and the  
amount of light generated by the flash apparatus 114, and a  
20 hue correcting circuit B 116 for correcting the hue and the  
chroma saturation based on the information representing the  
amount of light generated by the flash apparatus supplied  
from the flash control circuit 115.

The flow of signals among blocks 101-115 and the  
25 operations of these blocks are similar to those for blocks

201-215 shown in Fig. 6.

The flash control circuit 115 supplies information about the illuminance of a subject obtained from the luminance signal and information about the amount of light generated by the flash apparatus 114 to the white balance control circuit 112 and the color correcting circuit B 116.

When the flash apparatus 114 is used, the white balance control circuit 112 controls the white balance based on the illuminance of the subject and the amount of light generated by the flash apparatus 114 as in the conventional image pickup apparatus described earlier.

The color correcting circuit B 116 is an essential part that characterizes the present embodiment. That is, the color correcting circuit B 116 corrects the color balance of an image taken using the flash apparatus 114, in accordance with the subject's illuminance determined from the signal level of the luminance signal Y supplied via the flash control circuit 115 and also in accordance with the amount of light generated by the flash apparatus 114 wherein the correction of the color balance is performed by controlling the linear matrix circuit 109 and the color difference gain control circuit 110.

Figs. 2A to 2C are vector diagrams in the color difference coordinates R-Y and B-Y, illustrating a shift in color balance which occurs when an image is taken under

illumination from an incandescent lamp and a shift which occurs when the image is taken under illumination from a fluorescent tube, where Fig. 2A is a vector diagram of a color bar chart photographed under illumination of an ideal  
5 light source, Fig. 2B is a vector diagram of a color bar chart photographed under illumination from an incandescent lamp, and Fig. 2C is a vector diagram of a color bar chart photographed under illumination from a fluorescent tube.

In these figures, open rectangles denote vectors in  
10 color difference coordinates for each color of the color bar charts photographed, and shaded circles or ellipses denote vectors for color signals detected.

Fig. 2A illustrates color difference vectors obtained when the color bar chart is photographed under ideal  
15 illumination. In this case, original colors are reproduced faithfully.

In the case of Fig. 2B, in which illumination is provided by an incandescent lamp, expansion in R and contraction in Ye occur with respect to the color  
20 difference vectors obtained under ideal illumination.

On the other hand, under illumination provided by a fluorescent tube, as shown in Fig. 2C, contraction in R and expansion in Ye occur with respect to the color difference vector obtained under ideal illumination. These shifts in  
25 the color balance are corrected by the hue correcting

0936152 072799

circuit 213 in the conventional image pickup apparatus while the shifts are corrected by the hue correcting circuit A113 in the present embodiment of the present invention.

5           Fig. 3, including Figs. 3A to 3D, illustrates a process of correcting the shift in the color balance which occurs when an incandescent lamp is used. Fig. 3A shows a vector diagram of color balance obtained when the white balance is adjusted under illumination of the incandescent  
10   lamp without making any color balance correction. Fig. 3B shows a vector diagram obtained by further making a color balance correction. In this case, the correction is made by compressing R-Y and expanding B-Y. In addition, a linear matrix correction is also made.

15           Fig. 3C shows a vector diagram obtained when a picture is taken using the light of a flash apparatus under the conditions determined in Fig. 3B.

          Because the light of a flash apparatus has a spectrum closer to that which results in ideal color balance than an  
20   incandescent lamp, the correction of the color balance in accordance with the conditions determined under illumination from an incandescent lamp as shown in Fig. 3B results in a shift from the ideal color balance.

          The color balance varies depending on the intensity  
25   of the ambient light and the intensity of the light from

the flash apparatus. More specifically, when the intensity of the light from the flash apparatus is weak, the color balance becomes similar to that obtained under illumination from an incandescent lamp, while the color balance becomes  
5 similar to that obtained under illumination from a flash apparatus when the intensity of the light of the flash apparatus is high.

Fig. 3D shows a color balance obtained by making a further correction on the conditions shown in Fig. 3C. By  
10 multiplying the intensity of the ambient light in the conditions shown in Fig. 3C by a correction factor calculated from the amount of light from the flash apparatus, it is possible to achieve optimum balance for various subjects and for various amounts of light from the  
15 flash apparatus.

That is, depending the ratio of the amount of light from the flash apparatus to the intensity of the ambient light, the ratio of the correction associated with an incandescent lamp and the correction associated with the  
20 light from the flash apparatus is precisely calculated so as to obtain an optimum color balance.

Thus, the correction value associated with the color balance for the case where an incandescent lamp is used is determined in accordance with the intensity of the ambient  
25 light and the amount of light from the flash apparatus

09361152.07299

thereby correcting the color balance shown in Fig. 3A so as  
to obtain the color balance shown in Fig. 3B, and the  
correction value for the case where the flash apparatus is  
used is determined in accordance with the intensity of the  
5 ambient light and the amount of light from the flash  
apparatus and also in accordance with the ratio of the  
intensity of light from the flash apparatus to the  
intensity of the ambient light, thereby correcting the  
color balance shown in Fig. 3C so as to obtain the color  
10 balance shown in Fig. 3D. Thus, optimum color balance can  
be obtained for both cases.

Although in the above description, the correcting  
process is performed sequentially starting from the step  
shown in Fig. 3A to the step shown in Fig. 3D, it is  
15 possible to directly obtain conditions shown in Fig. 3D in  
accordance with the intensity of the ambient light and the  
calculated amount of light from the flash apparatus.

As can be seen from the above description, when an  
image is taken using the flash apparatus, it is possible to  
20 achieve an optimum color balance for any condition  
associated with the flash by correcting the color balance  
in accordance with the intensity of the ambient light and  
the amount of light generated by the flash apparatus.

Although in the present embodiment described above,  
25 the color balance is corrected based on both the intensity

of the ambient light and the amount of light from the flash apparatus, it may be possible to correct the color balance based on either one of the intensity of the ambient light and the intensity of the light from the flash apparatus.

5 That is, when an image is taken, whether the flash apparatus should be used or not may be determined in accordance with the intensity of the ambient light, and the intensity of light to be generated by the flash apparatus may be calculated in accordance with the intensity of the  
10 ambient light, and thus the color balance may be properly controlled in accordance with the intensity of the ambient light. Alternatively, the color balance may be controlled in accordance with the amount of light actually generated by the flash apparatus.

15 The correction values of the color balance may be stored in the memory 117, as represented by a broken line in Fig. 1, in the form of a table of data determined as a function of the amount of light generated by the flash apparatus. The correction value may also be calculated by  
20 means of linear interpolation.

The correction as to white balance is not essential to the present invention. That is, the correction described above may be possible based only on correction values determined for the light generated by the flash apparatus.  
25 Furthermore, although the color balance is corrected using



a linear matrix circuit in the present embodiment, another hue adjustment means may be employed.

#### Second Embodiment

5        Fig. 4 is a block diagram illustrating a second embodiment of an image pickup apparatus according to the present invention, in which when a picture is taken using a flash apparatus, the color balance is simply corrected in accordance with correction data prepared for use with the  
10    flash apparatus.

Elements 301-311 shown in Fig. 4 correspond to elements 101-111, respectively, shown in Fig. 1 and elements 314 and 315 shown in Fig. 4 correspond to elements 114 and 115, respectively, shown in Fig. 1. Reference  
15    numeral 317 denotes a hue correcting circuit for controlling a hue correcting process in accordance with hue data. Reference numeral 318 denotes a source of hue data A (e.g., a portion of memory) employed when the flash apparatus is not used and reference numeral 319 denotes a  
20    source of hue data B (e.g., a portion of memory) employed when the flash is used. Reference numeral 320 denotes a switch for switching between the source of hue data A 318 and the source of hue data B 319.

In Fig. 4, the video signal flows in a similar manner  
25    to the first embodiment. The flash control circuit 315

controls the switch 320 such that the switch 320 selects hue data B 318 when the flash apparatus is not used, while the switch 320 selects hue data A 319 when the flash apparatus is used.

5           Color rendering obtained when the flash apparatus is used is described below. Figs. 5A and 5B illustrate spectral distributions of solar light and light from a flash apparatus, respectively. Fig. 5A illustrates a spectral distribution of solar light on which the color  
10   rendering is based. That is, hues are generally determined such that a color bar chart photographed under illumination of solar light has optimum color balance. The hue data A 318 represents such hues. Fig. 5B illustrates a spectral distribution of light generated by the flash apparatus. As  
15   can be seen, the flash provides relatively high color rendering although not as high as 100%.

The hue data B 319 represents hues which give optimum color balance when the color bar chart is photographed using the flash apparatus.

20           By employing the color balance data prepared for use in photographing with the flash apparatus, as described above, it becomes possible to achieve optimum color balance when a picture is taken using the flash apparatus.

In the present embodiment, when a picture is taken  
25   without using the flash apparatus, the hue data optimized

for solar light is employed. However, hue data optimized for another light source other than solar light may also be employed. A plurality of hue data may be prepared so that proper hue data may be selected depending on a factor other  
5 than the flash. Furthermore, although the color balance correction is performed using a linear matrix circuit in the present embodiment, another hue adjustment means may be employed.

As described above, the present invention provides a  
10 technique for achieving optimum color balance when a picture is taken using a flash apparatus by switching the settings associated with the hue or color saturation in accordance with either one or both of the amount of light generated by the flash apparatus and the intensity of  
15 ambient light.

The present invention also provides a technique for achieving optimum color balance when a picture is taken using the flash apparatus by switching the settings associated with the hue or color saturation in accordance  
20 with white balance information so as to adjust the white balance depending on the amount of light generated by the flash apparatus and the intensity of the ambient light.

While the present invention has been described with respect to what is presently considered to be the preferred  
25 embodiments, it is to be understood that the invention is

5

WHAT IS CLAIMED IS:

1. An image pickup apparatus for use with a flash apparatus, comprising:

control means for determining the amount of light generated by the flash apparatus;

color adjusting means for controlling hue or color saturation; and

first hue controlling means for controlling said color adjusting means such that hue or color saturation is corrected in accordance with the amount of light determined by said control means.

2. An image pickup apparatus according to Claim 1, further comprising:

means for detecting a color temperature of a subject; and

second hue controlling means for controlling said color adjusting means such that hue or color saturation is corrected in accordance with the color temperature of the subject detected by said detecting means,

wherein said first hue controlling means corrects a correction result of said second hue controlling means.

3. An image pickup apparatus according to Claim 1,

0936452.072799

wherein said color adjusting means includes a matrix circuit which multiplies a first color difference signal by a factor and adds the result to a second color difference signal and which multiplies the second color difference signal by a factor and adds the result to the first color difference signal.

4. An image pickup apparatus for use with a flash apparatus, comprising:

illuminance detecting means for detecting the illuminance of a subject;

color adjusting means for controlling hue or color saturation; and

first hue controlling means for controlling said color adjusting means such that hue or color saturation is corrected in accordance with the illuminance of the subject detected by said illuminance detecting means.

5. An image pickup apparatus according to Claim 4, further comprising:

color temperature detecting means for detecting a color temperature of the subject;

second hue controlling means for controlling said color adjusting means in accordance with the color temperature of the subject detected by said color

temperature detecting means,

wherein said first hue controlling means corrects a correction result of said second hue controlling means.

6. An image pickup apparatus according to Claim 4, wherein said color adjusting means includes a matrix circuit which multiplies a first color difference signal by a factor and adds the result to a second color difference signal and which multiplies the second color difference signal by a factor and adds the result to the first color difference signal.

7. An image pickup apparatus for use with a flash apparatus, comprising:

color temperature detecting means for detecting a color temperature of a subject;

illuminance detecting means for detecting the illuminance of a subject;

control means for determining the amount of light generated by the flash apparatus;

color adjusting means for controlling hue or color saturation;

first hue controlling means for controlling hue or color saturation in accordance with the color temperature of a subject detected by said color temperature detecting

05364452 072799

means; and

second hue controlling means for controlling said color adjusting means such that hue or color saturation is corrected in accordance with the illuminance detected by said illuminance detecting means and also in accordance with the amount of light determined by said control means.

8. An image pickup apparatus according to Claim 7, wherein said color adjusting means includes a matrix circuit which multiplies a first color difference signal by a factor and adds the result to a second color difference signal and which multiplies the second color difference signal by a factor and adds the result to the first color difference signal.

9. An image pickup apparatus for use with a flash apparatus, comprising:

color adjusting means for controlling hue or color saturation;

color temperature detecting means for detecting a color temperature of a subject;

first hue controlling means for controlling said color adjusting means in accordance with the color temperature of a subject detected by said color temperature detecting means;



memory means for storing hue information used to make a color correction when said flash apparatus is used; and  
second hue controlling means for controlling said color adjusting means in accordance with the hue information stored in said memory means such that the hue information for said flash apparatus is selected when said flash apparatus is used.

10. An image pickup apparatus according to Claim 9, wherein said color adjusting means includes a matrix circuit which multiplies a first color difference signal by a factor and adds the result to a second color difference signal and which multiplies the second color difference signal by a factor and adds the result to the first color difference signal.

11. An image pickup apparatus for use with a flash apparatus, comprising:

white balance controlling means for controlling white balance in accordance with either the illuminance of a subject or the amount of light generated by the flash apparatus;

color adjusting means for controlling hue or color saturation; and

hue controlling means for controlling said color

093445 0799  
6620 257366

adjusting means in accordance with white balance information generated by said white balance controlling means such that when white balance information varies in response to the illuminance of the subject or the amount of light generated by the flash apparatus, where said hue controlling means controls said color adjusting means in accordance with the white balance information.

12. An image pickup apparatus according to Claim 11, wherein said color adjusting means includes a matrix circuit which multiplies a first color difference signal by a factor and adds the result to a second color difference signal and which multiplies the second color difference signal by a factor and adds the result to the first color difference signal.

13. An image pickup apparatus for use with a flash apparatus, comprising:

color adjusting means for controlling hue or color saturation; and

hue controlling means for controlling said color adjusting means such that when a flash apparatus is used, said color adjusting means corrects hue or color saturation.

14. An image pickup apparatus according to Claim 13,

15. An image pickup apparatus according to Claim 1,  
wherein said image pickup apparatus comprises the flash  
apparatus.

17. An image pickup apparatus according to Claim 7,  
wherein said image pickup apparatus comprises the flash  
apparatus.

18. An image pickup apparatus according to Claim 9,  
wherein said image pickup apparatus comprises the flash  
apparatus.

19. An image pickup apparatus according to Claim 11,

wherein said image pickup apparatus comprises the flash apparatus.

20. An image pickup apparatus according to Claim 13, wherein said image pickup apparatus comprises the flash apparatus.

0936452-072999

### ABSTRACT OF THE DISCLOSURE

A camera for use with a flash apparatus is capable of achieving excellent color balance when a picture is taken using the flash apparatus. The camera comprises a flash control circuit that controls the amount of light generated by the flash apparatus, and a color adjusting circuit including a linear matrix circuit and a gain control circuit that controls hues or color saturation. A color correcting circuit controls the color adjusting circuit such that the hue or color saturation is properly adjusted in accordance with the amount of light determined by the flash control circuit.



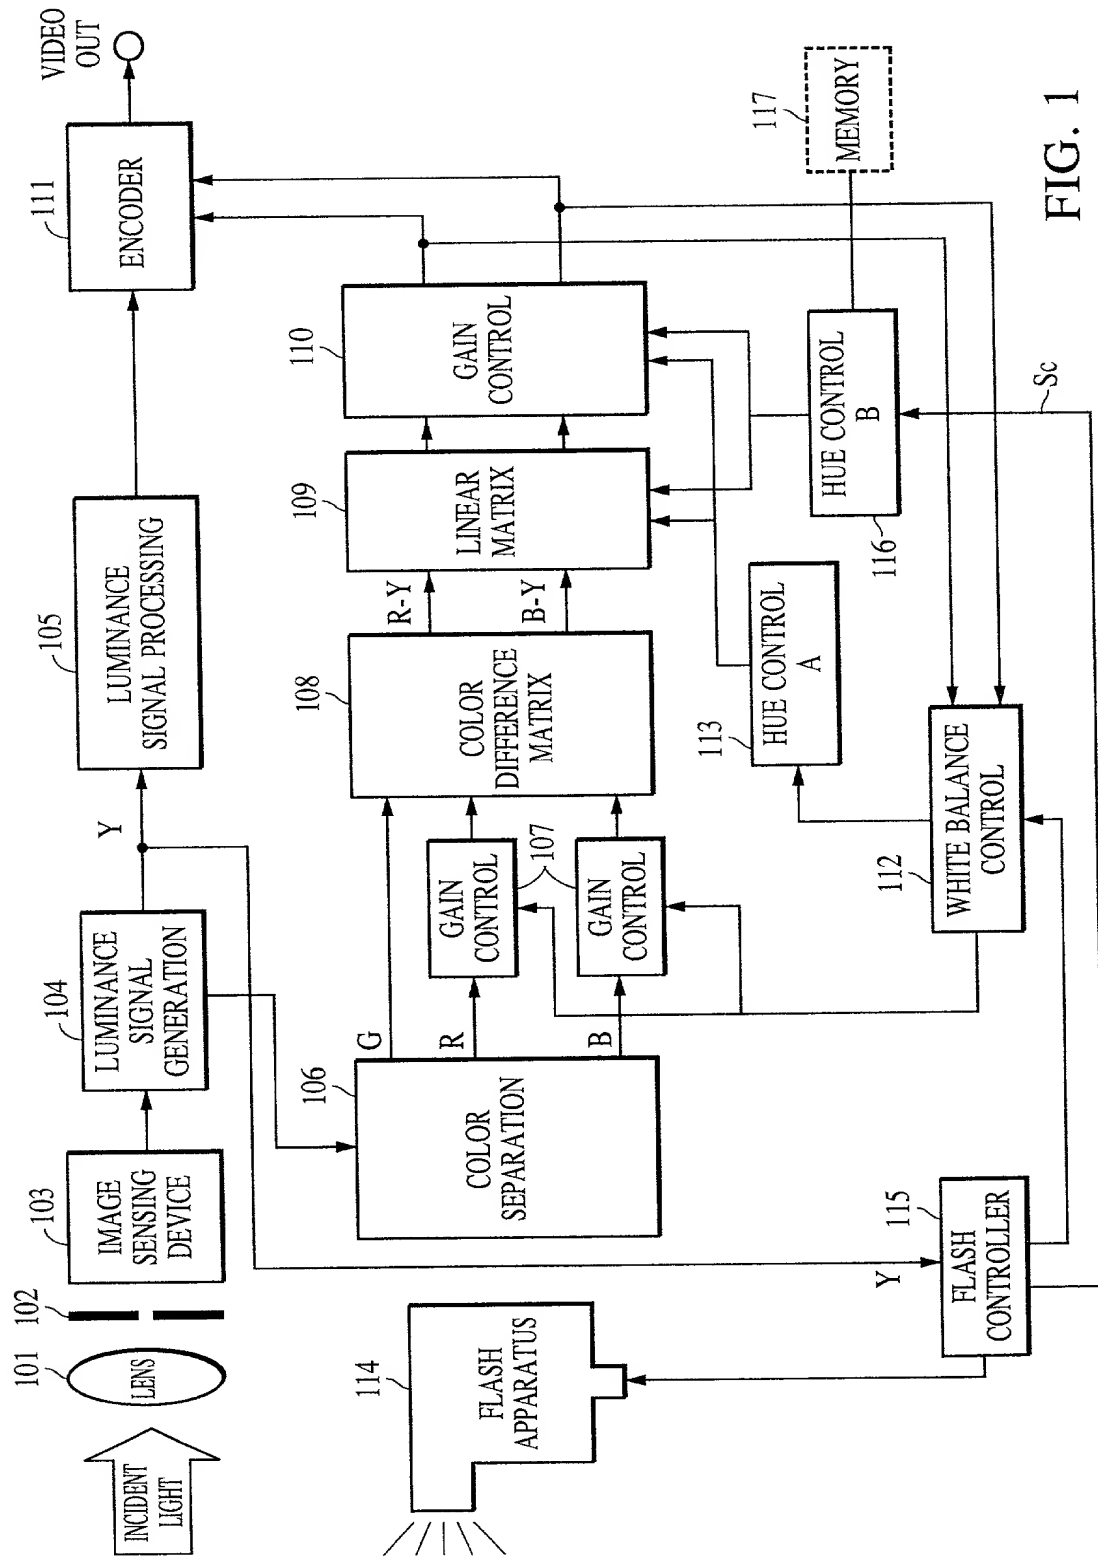



FIG. 1

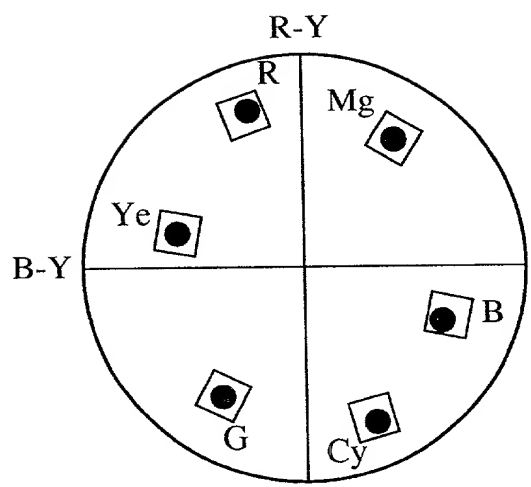


IDEAL COLOR BALANCE  
FIG. 2A

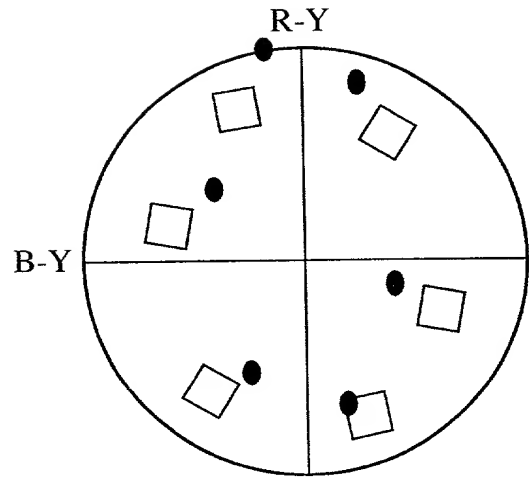

COLOR BALANCE  
UNDER ILLUMINATION  
OF INCANDESCENT LAMP  
FIG. 2B

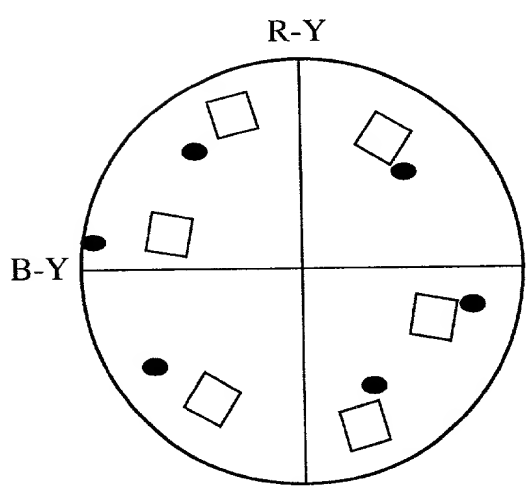


COLOR BALANCE  
UNDER ILLUMINATION  
OF FLUORESCENT LAMP  
FIG. 2C

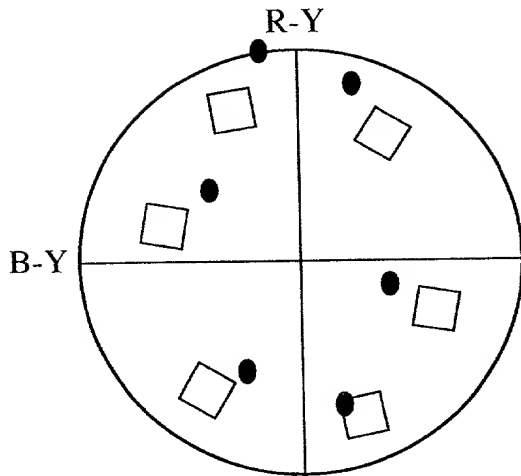


COLOR BALANCE OBTAINED  
UNDER ILLUMINATION  
OF INCANDESCENT LAMP

FIG. 3A

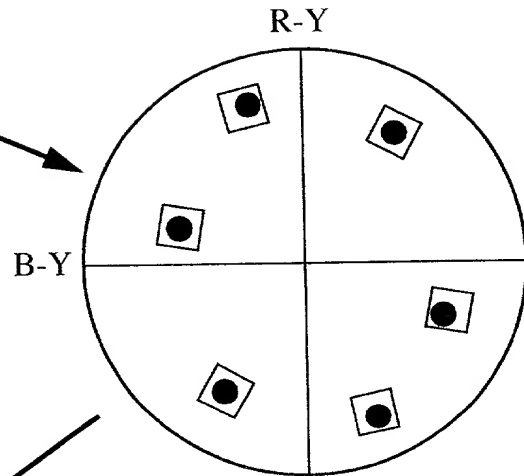


AFTER COLOR BALANCE  
CORRECTION

FIG. 3B

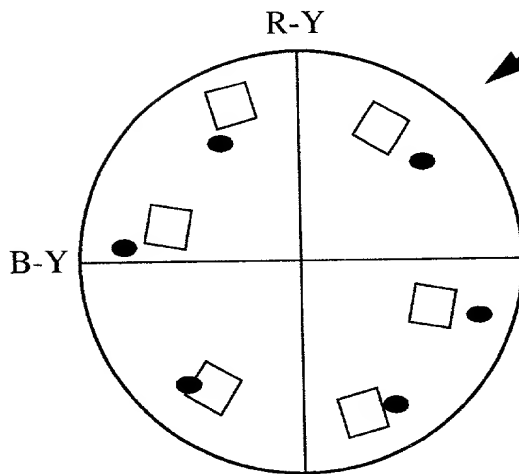

COLOR BALANCE OBTAINED  
UNDER ILLUMINATION OF  
FLASH APPARATUS

FIG. 3C

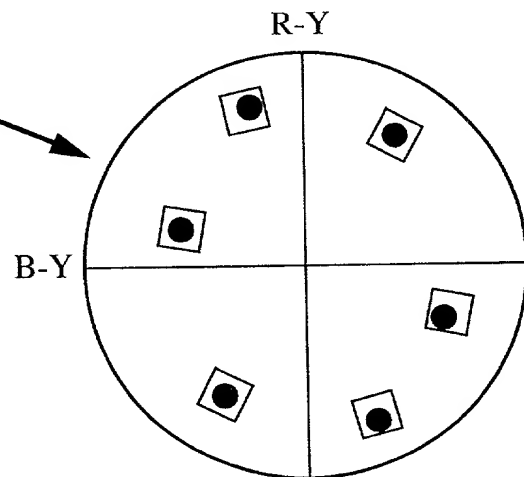

COLOR BALANCE OBTAINED  
AFTER READ JUSTMENT

FIG. 3D



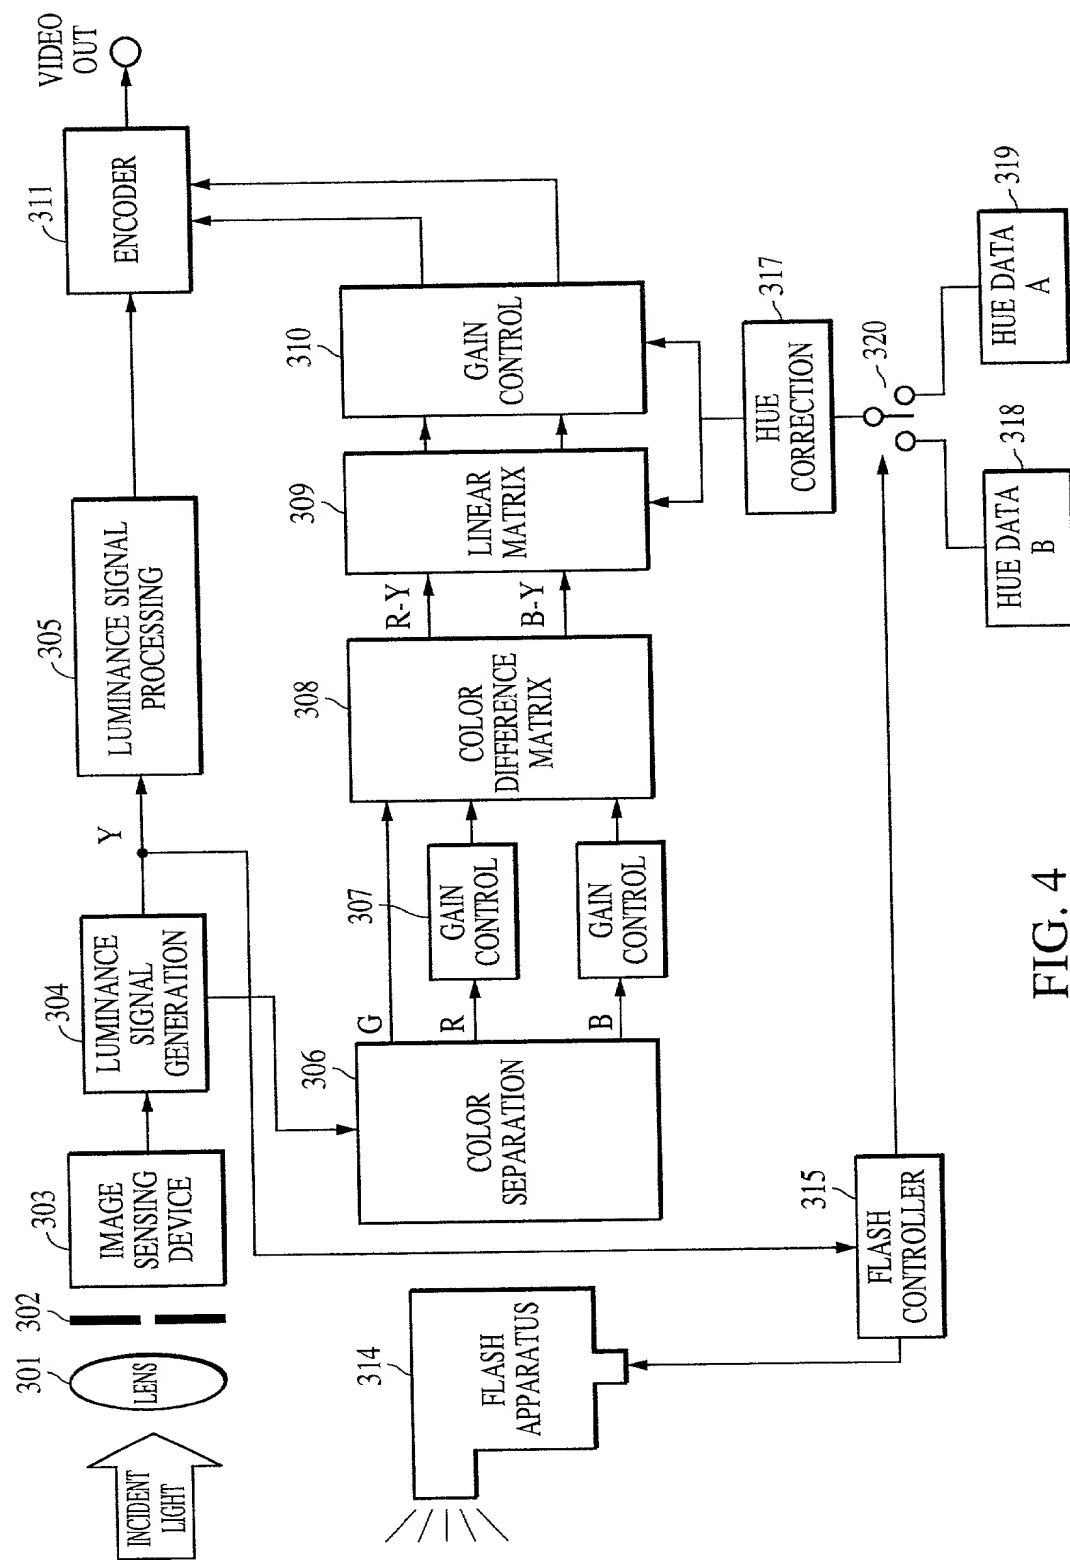


FIG. 4

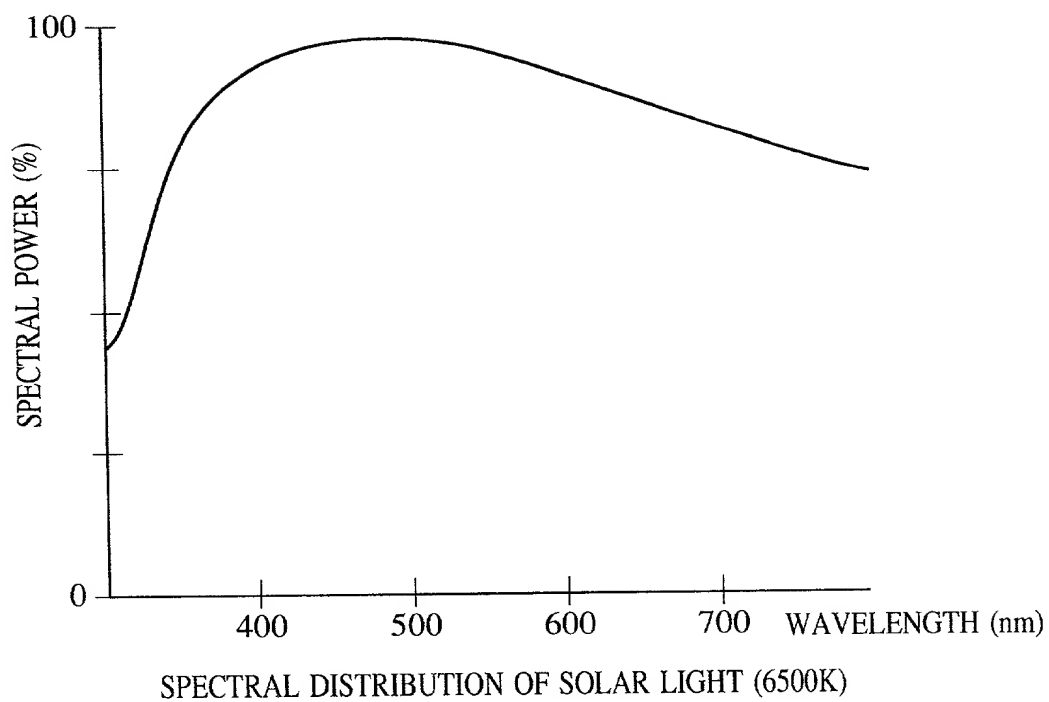


FIG. 5A

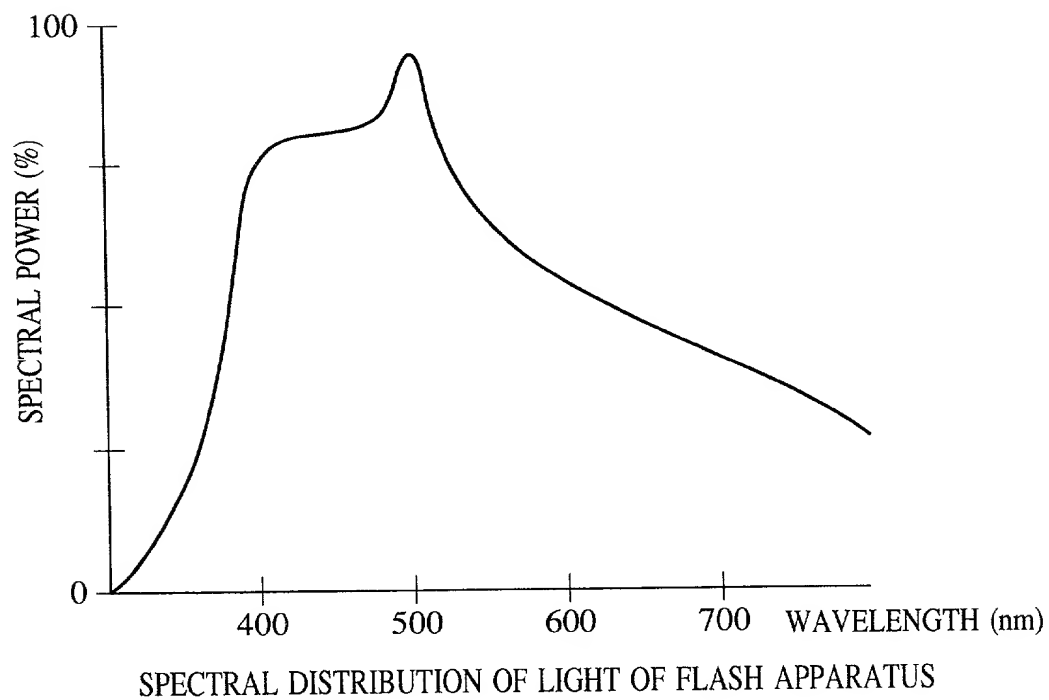


FIG. 5B

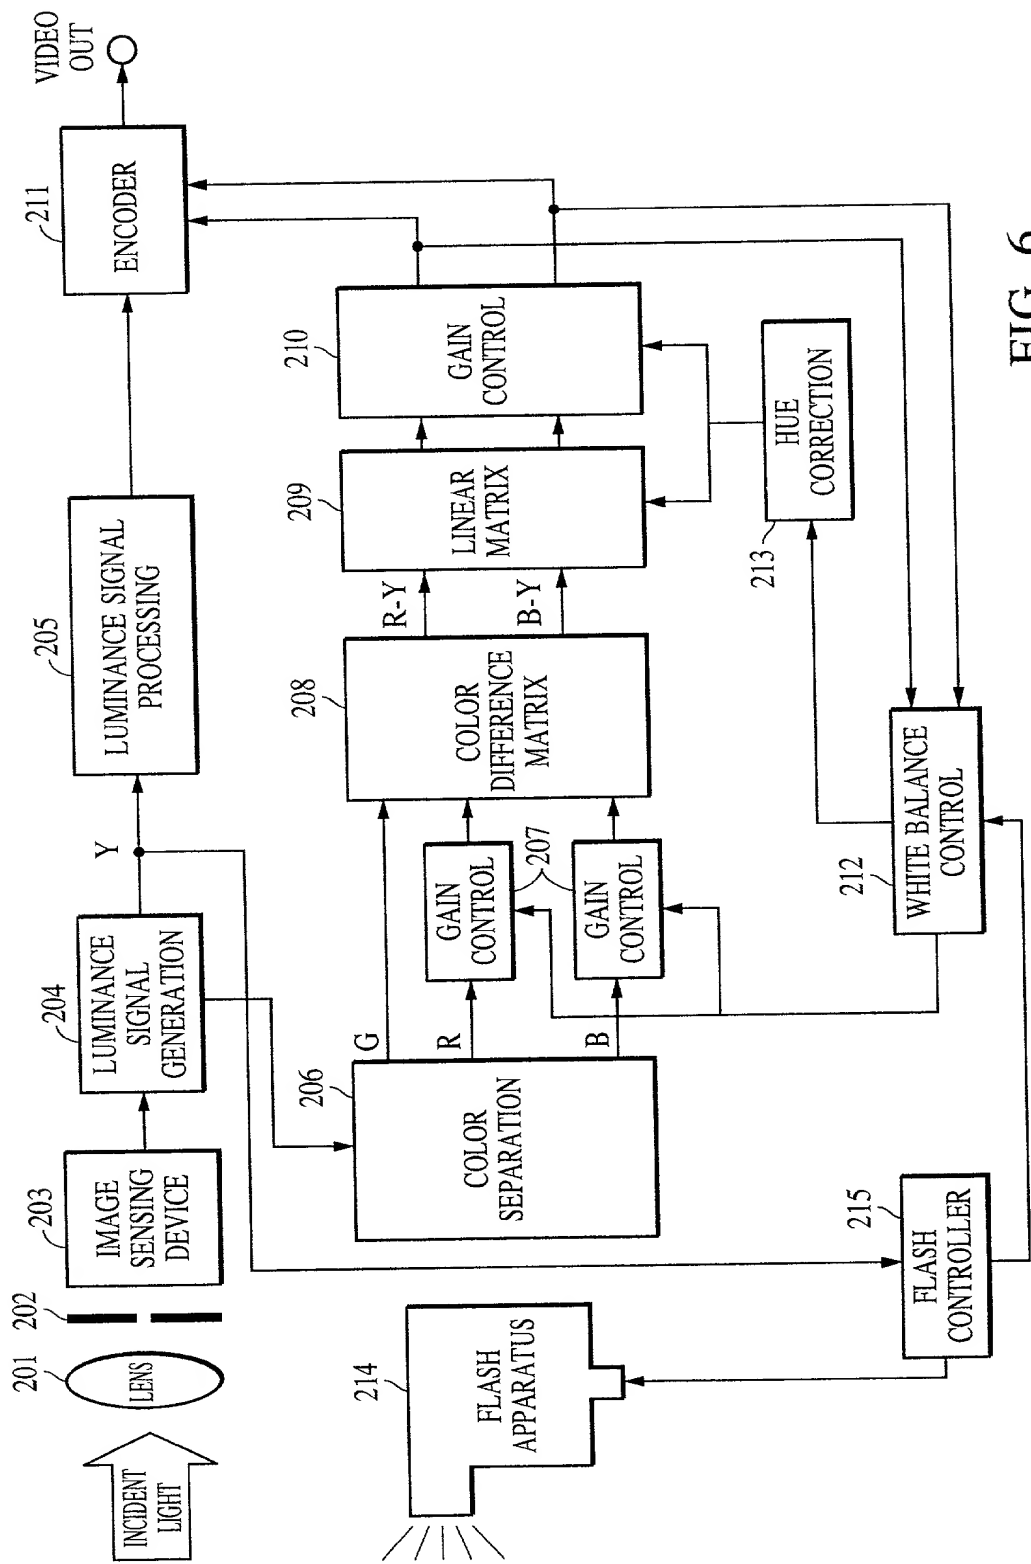


FIG. 6

COMBINED DECLARATION AND POWER OF ATTORNEY  
FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled IMAGE PICKUP APPARATUS HAVING FLASH AND COLOR ADJUSTMENT CONTROL

the specification of which ☒ is attached hereto ☐ was filed on \_\_\_\_\_ as United States Application No. or PCT International Application No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed:

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
Japan	10-215694	30/July/1998	Yes

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

**FITZPATRICK, CELLA, HARPER & SCINTO**  
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor SATOSHI NAKAYAMA

Inventor's signature \_\_\_\_\_

Date \_\_\_\_\_ Citizen/Subject of JAPAN

Residence 1-6-7-101, Osone, Kohoku-ku, Yokohama-shi, Kanagawa-ken, Japan

Post Office Address c/o CANON KABUSHIKI KAISHA, 3-30-2, Shimomaruko, Ohta-ku, Tokyo, Japan